

# DuPont™ Krytox® Aerospace Grade Oils and Greases

DUPONT PERFORMANCE LUBRICANTS PROVIDE THE SOLUTION YOU NEED

Typical Properties\* of DuPont™ Krytox® Aerospace Grade Fluorinated Oils


Property	ASTM Test Method	Test Conditions	Units	Aerospace Oil Grade					
				143AZ	143AA	143AY	143AB	143AC	143AD
Average Molecular Weight	NMR			2060	2210	2810	3800	5940	7480
Viscosity	ASTM D445	-32 °C (-25 °F)	cSt	7480	12340	24000	44620	—	—
		0 °C (32 °F)		228	350	620	1070	3940	7500
		20 °C (68 °F)		60	88	146	240	800	1540
		38 °C (100 °F)		24.7	35	55	86	270	502
		40 °C (104 °F)		22.8	32	50	78	243	450
		99 °C (210 °F)		4.2	5.4	7.5	10.5	26	44
		100 °C (212 °F)		4.1	5.3	7.4	10.2	25.4	42.4
		204 °C (400 °F)		1.1	1.3	1.7	2.1	4.1	6.0
		260 °C (500 °F)		—	—	—	—	2.4	3.4
Viscosity Index	ASTM D2270			60	96	109	113	134	146
Pour Point	ASTM D97		°C	-55	-50	-45	-40	-35	-30
			°F	-70	-60	-50	-40	-30	-20
Distillation Range	ASTM D1160	53 Pa (0.4 torr)	°C	140/210	170/245	190/265	215/290	260/370	300/400+
			°F	285/410	340/475	375/510	420/555	500/700	570/750+
Oil Density			g/mL						
		0 °C (32 °F)		1.91	1.92	1.93	1.93	1.95	1.95
		100 °C (212 °F)		1.72	1.74	1.75	1.75	1.77	1.78
Vapor Pressure	Knudsen	38 °C (100 °F)	torr	4 x 10 <sup>-4</sup>	1 x 10 <sup>-4</sup>	4 x 10 <sup>-5</sup>	5 x 10 <sup>-6</sup>	8 x 10 <sup>-8</sup>	6 x 10 <sup>-9</sup>
		260 °C (500 °F)	torr	1.5	0.8	0.15	3 x 10 <sup>-2</sup>	2 x 10 <sup>-3</sup>	3 x 10 <sup>-4</sup>
		38 °C (100 °F)	kPa	5 x 10 <sup>-5</sup>	1 x 10 <sup>-5</sup>	5 x 10 <sup>-6</sup>	7 x 10 <sup>-7</sup>	1 x 10 <sup>-8</sup>	8 x 10 <sup>-10</sup>
		260 °C (500 °F)	kPa	0.2	0.1	2 x 10 <sup>-2</sup>	4 x 10 <sup>-3</sup>	3 x 10 <sup>-4</sup>	4 x 10 <sup>-5</sup>
Volatility	ASTM D2595	149 °C (300 °F)	wt% loss in 22 hr	24.2	24.5	7.5	1.9	—	—
		204 °C (400 °F)		—	72.5	47.6	17.3	<1	—
		260 °C (500 °F)		—	—	—	76.2	4	2
Estimated Useful Range			°C	-57-149	-51-177	-46-204	-40-232	-34-288	-29-316
			°F	-70-300	-60-350	-50-400	-40-450	-30-550	-20-600

\*This table gives typical properties (not specifications) based on historical production performance. Viscosity may vary within +10%. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.




The miracles of science™

**Figure 1. Viscosity vs. Temperature of DuPont™ Krytox® Aerospace Grade Fluorinated Oils**

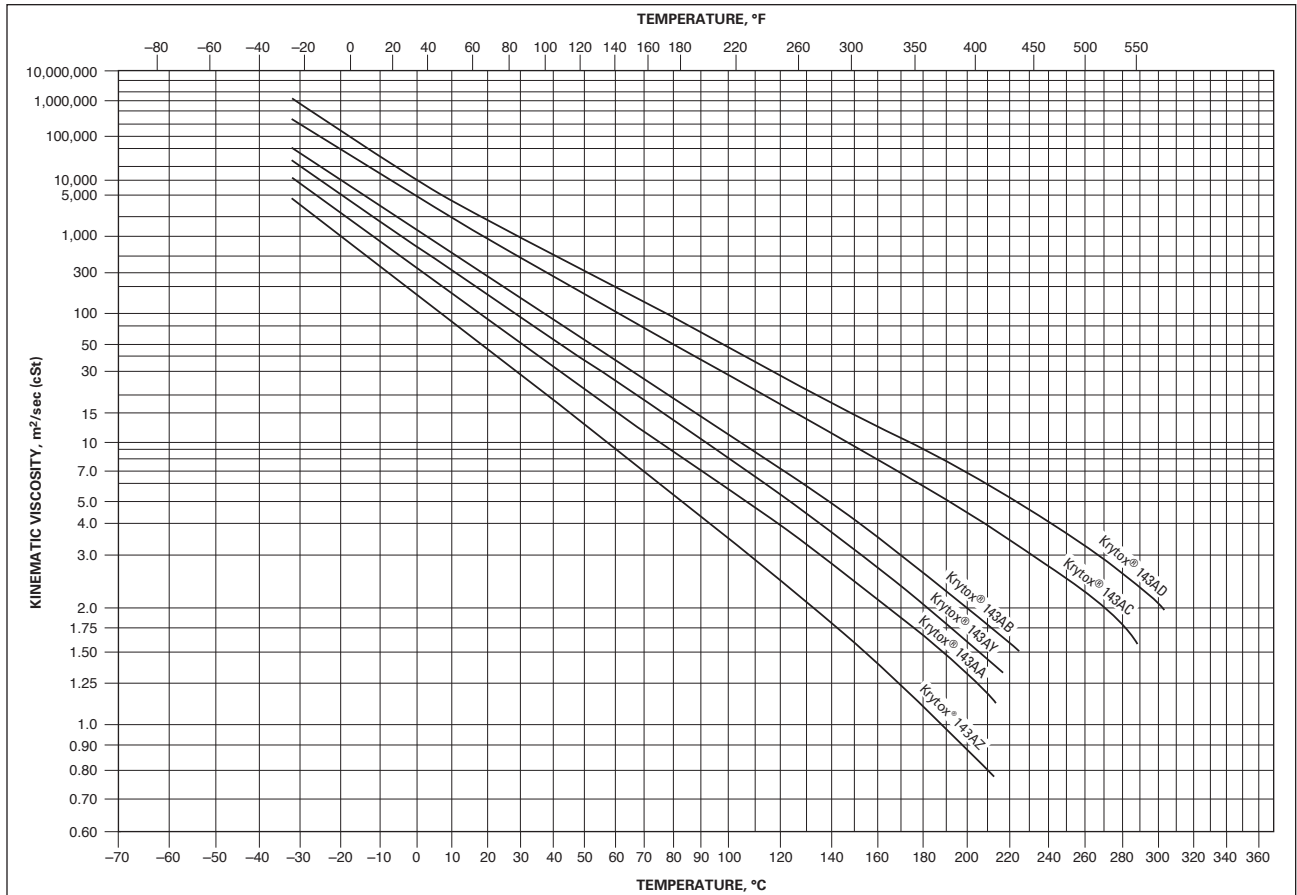

**Figure 2. Vapor Pressure vs. Temperature of DuPont™ Krytox® Aerospace Grade Fluorinated Oils**

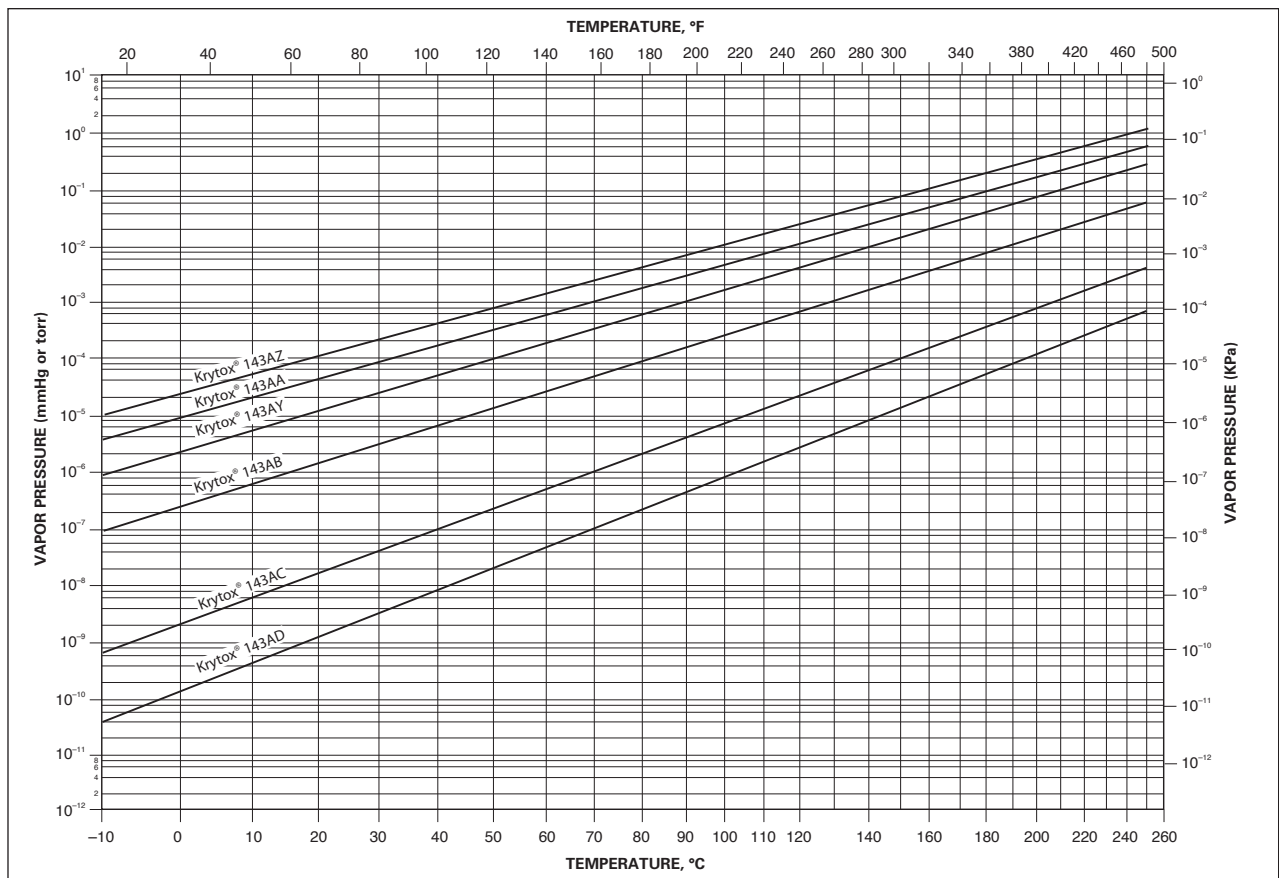

## Typical Properties\* of DuPont™ Krytox® Aerospace Grade Fluorinated Greases

Property	ASTM Test Method	Test Conditions	Units	Aerospace Grades				
<b>Aerospace Grease Grade</b>				<b>240AZ</b>	<b>240AA</b>	<b>240AB</b>	<b>240AC</b>	<b>240AD</b>
<b>Extreme Pressure Grade</b>				<b>250AZ</b>	—	—	<b>250AC</b>	<b>250AD</b>
<b>Rust Inhibited Grade</b>				—	—	<b>280AB</b>	<b>280AC</b>	—
<b>Rust Inhibited Grade</b>				<b>283AZ</b>	<b>283AA</b>	<b>283AB</b>	<b>283AC</b>	<b>283AD</b>
Viscosity of Base Oil	ASTM D445		cSt					
20 °C (68 °F)				60	88	240	800	1540
38 °C (100 °F)				24.7	35	86	270	502
99 °C (210 °F)				4.2	5.4	10.5	26	44
204 °C (400 °F)				1.08	1.3	2.1	4.1	6.0
Vapor Pressure of Base Oil	Knudsen							
38 °C (100 °F)			torr	4 x 10 <sup>-4</sup>	1 x 10 <sup>-4</sup>	5 x 10 <sup>-6</sup>	8 x 10 <sup>-8</sup>	6 x 10 <sup>-9</sup>
260 °C (500 °F)			torr	1.5	0.8	3 x 10 <sup>-2</sup>	2 x 10 <sup>-3</sup>	3 x 10 <sup>-4</sup>
Volatility of Base Oil	ASTM D2595		wt% loss in 22 hr					
149 °C (300 °F)				24.2	22.5	1.9	—	—
204 °C (400 °F)				—	72.5	17.3	<1	—
260 °C (500 °F)				—	—	76.2	4	2
Pour Point of Base Oil	ASTM D97							
		°C		-55	-50	-40	-35	-30
		°F		-70	-60	-40	-30	-20
Texture								Buttery
Penetration	ASTM D217	60 Strokes						265–295
Mechanical Stability	ASTM D217	10,000 and 100,000 Strokes						No change from original grade
Oxidation Stability	ASTM D942	99 °C (210 °F)						0 psig O <sub>2</sub> pressure drop after 600 hr
Liquid Oxygen Impact	ASTM D2512, NASA MSFC 106B							Pass
Grease Density		25 °C (77 °F)	g/mL	1.89	1.91	1.92	1.93	1.93
Oil Separation	ASTM D6184	99 °C (210 °F) 204 °C (400 °F)	wt% loss in 30 hr	6 —	5 20	4 12	3 11	3 10
Estimated Useful Range		°C		-57–149	-51–177	-40–232	-34–288	-29–316
		°F		-70–300	-60–350	-40–450	-30–550	-20–550+

\* This table gives typical properties (not specifications) based on historical production performance. Viscosity may vary within +10%. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

DuPont™ Krytox® 143 series oils are clear, colorless, fluorinated synthetic oils that are nonreactive, nonflammable, safe in chemical and oxygen service, and are long-lasting. Krytox® is a perfluoropolyether (PFPE)—also called perfluoroalkylether (PFAE) or perfluoropolyalkylether (PFPAE)—with the following chemical structure:



The polymer chain is completely saturated and contains only carbon, oxygen, and fluorine. On a weight basis, a typical Krytox® oil contains 21.6% carbon, 9.4% oxygen, and 69.0% fluorine.

All standard grades of grease are thickened with high efficiency PTFE, whose formula is  $(\text{CF}_2-\text{CF}_2)_n$ . This special high efficiency thickener has a melting point of 325°C (617°F) and has low molecular weight and submicron (0.2 μ) particle size for higher performance in bearings.

Krytox® 240 series greases are white buttery greases with all of the same properties as our 143 series oils that they are made from, but they are in grease form.

Krytox® 250 series EP greases are black greases that contain molybdenum disulfide added as an extreme pressure additive for highly loaded gears and bearings.

Krytox® 283 series anticorrosion greases are white greases that contain sodium nitrite. These grades provide rust protection at ambient temperatures, corrosion protection at high temperatures, and antiwear protection.

**DuPont™ Krytox® 240 AC, 240 AB and 240 AZ gr-1 greases now have NSF approval for incidental food contact (H-1) in and around food processing areas.**

## DuPont Performance Lubricants

**Extreme conditions. Extreme performance.**

For more information or for technical assistance, please call **1-800-424-7502** or contact us at [krytox@usa.dupont.com](mailto:krytox@usa.dupont.com)

For international sales and support contacts, visit us at [www.lubricants.dupont.com](http://www.lubricants.dupont.com)

Copyright © 2010 DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™ and Krytox® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

H-58519-7 (04/10) Printed in the U.S.A.

The information set forth herein is furnished free of charge and based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill and at their own discretion and risk. Because conditions of use are outside our control, DuPont makes no warranties, express or implied, and assumes no liability in connection with any use of this information. Nothing herein is to be taken as license to operate under or a recommendation to infringe any patents or trademarks.



*The miracles of science™*