


DuPont™ Cyrel® 1000 ECLF

STATE-OF-THE-ART EXPOSURE, LIGHT FINISHER AND POST-EXPOSURE UNIT

DuPont Packaging Graphics



DuPont™ Cyrel® 1000 ECLF

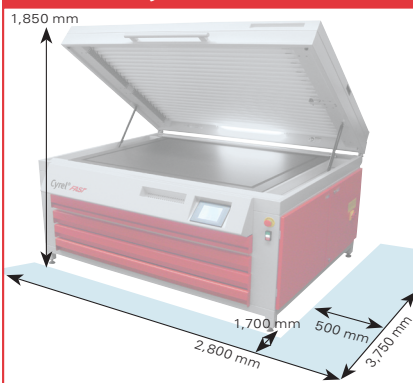

Floor Plan

DuPont Packaging Graphics is a leading supplier serving the package printing markets with DuPont™ Cyrel® flexographic solutions. The Cyrel® systems for analog and digital applications, which are available for solvent and thermal processing, comprise sheet photopolymer plates, continuous sleeves, plate making and mounting equipment. DuPont has been advancing flexography for over 35 years and offers a complete range of equipment. The DuPont™ Cyrel® systems are renowned for their unmatched production performance, for top quality plates and improvements in the overall pre-press workflow.

The DuPont™ Cyrel® 1000 ECLF is the state-of-the-art exposure, light finisher and post exposure unit, designed to expose all Cyrel® photopolymer plates, including Cyrel® FAST.

Benefits

- Maximum plate size 900 x 1,200 mm
- Light integrator controlled exposure
- Clamshell design
- Outstanding vacuum draw down
- Anodised temperature controlled exposure bed
- Optimum productivity

Product Features

DuPont™ Cyrel® 1000 ECLF can expose, post-expose and finish to the highest quality, photopolymer plates up to a nominal maximum format of 900 x 1,200 mm (36 inch x 48 inch).

The Exposure section is a clamshell design holding 24 UV-A fluorescent tubes with built-in reflectors. One yellow control tube illuminates the exposure bed for inspection of the plate surface. Unique to this exposure unit is the anodised temperature controlled bed, closed loop system that controls the exposure bed temperature, which translates into predictable and consistent exposures. The unit is fitted with a light integrator that compensates for the decrease in light output as the tubes age. To meet the demanding needs of high quality plates, the user can easily customise the 25 basic exposure set-ups.

Each tube is constantly monitored by a light guide, giving the operator a visual indication. There are three counters imbedded in the PLC to keep track of the number of hours the UV-A and UV-C tubes have been in operation.

The Post Exposure and Light Finisher section hold 19 UV-C and 20 UV-A tubes. The PLC allows the user to perform post exposure and finishing simultaneously. The post exposure and finisher section has 25 basic set-ups that can be easily customized by the user.

Download latest version



Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 1000 ECLF	Cooled exposure, post exposure and light finisher
SAP Article Number	MH74451A	
Plate Thickness	0.5 mm to 7.0 mm	
Max. Nominal Plate Width	900 mm (36 inch)	
Max. Nominal Plate Length	1,200 mm (48 inch)	
UV-A Lamps: Wave Length	360 nm – 380 nm	
UV-C Lamps: Wave Length	254 nm	
Electrical (Field Configurable)	370 / 440 Volt – 50 / 60 hz 208 / 240 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
Power (Nominal)	10 kW	
Current (Nominal Load)	16 Amp @ 400 Volt 26 Amp @ 230 Volt	
Connecting Wires	400 Volt configuration 230 Volt configuration	5 x 4 mm ² 4 x 4 mm ²
Grounding	≤ 0.1 Ω	
Exhaust (Light Finisher)	Ø 140 mm (5.5 inch)	800 m ³ / h (min)
Environmental Data	Temperature range: 17°C to 28°C (63°F to 82°F)	Relative humidity from 10% to 80% non-condensing
Compressed Air Supply	NA	NA
Dimensions	Uncrated D 1,550 mm (61.0 inch) W 1,800 mm (70.9 inch) H 1,060 mm (41.8 inch) H - open 1,850 mm (72.9 inch) (open)	Crated 1,650 mm (65.0 inch) 1,900 mm (74.8 inch) 1,500 mm (59.0 inch)
Weight	700 kg (1,764 lbs)	970 kg (2,138 lbs)
Colour	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

DuPont de Nemours (Deutschland) GmbH
DuPont Electronics & Communications
Hugenottenallee 173 – 175
63263 Neu-Isenburg
Deutschland
Tel: +49 (0) 6102 18 4400

DuPont (U.K.) Limited
DuPont Electronics & Communications
Wedgwood Way, Stevenage
Hertfordshire SG1 4QN
United Kingdom
Tel: +44 (0) 1438 73 4863



www.cyrel.co.uk

© 2012 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, The miracles of science™, and Cyrel® are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.

All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.

EDS-EU0002-UK 01/2012



The miracles of science™