

DuPont™ Cyrel® DPC

THE LOW DUROMETER DIGITAL PLATE DESIGNED FOR CORRUGATED

DuPont Packaging Graphics

To help our customers gain competitive advantage in the global packaging graphics value chain.

DuPont Packaging Graphics continues to be a global technology leader in supplying flexographic printing systems. Our scientists continue to develop unique solutions based on new technologies to help our customers expand their business by taking advantage of new profitable packaging printing opportunities.

DuPont Packaging Graphics portfolio of products includes Cyrel® brand photopolymer plates (analogue and digital), Cyrel® plate-making equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.


Cyrel® DPC is a soft digital plate which has been developed especially for the corrugated market. Highest quality results are achieved on any type of corrugated board using water-based inks.

Applications

- Corrugated post-print
- Sacks
- Rough paper surfaces

Product Features

- Excellent ink transfer permits superior printing uniformity
- High exposure resolution results in better quality reproduction
- Image relief is clean and sharp
- Exceptional exposure latitude allows single exposure without masking

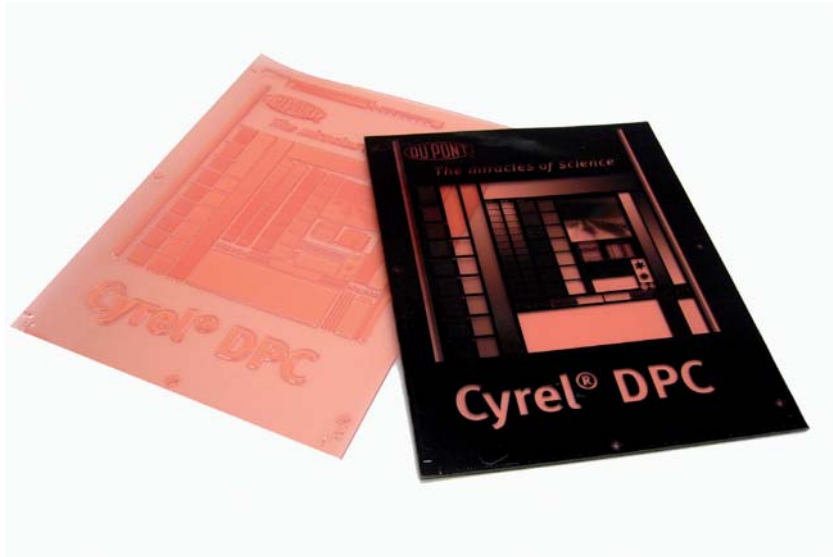

DuPont™ Cyrel® DPC

- Excellent thickness uniformity
- Less make ready time
- High resistance to ozone and white light results in excellent storage capability

Printing ink and solvent compatibility

Cyrel® DPC offers excellent compatibility with water based inks.

Process of use

Expose the plate through the back to establish the floor and maximize sensitivity. Back exposure varies according to relief required. Remove the protective coversheet and image the plate with the Cyrel® Digital Imager (CDI). Expose the front of the plate surface. Process the plate in the Cyrel® solvent processor to remove unexposed polymer. Finish the plate in a light finisher

to eliminate surface tackiness.

Storage – Raw Material

Store unexposed plates in a cool area (4-32° C), away from direct sources of heat. Humidity control is not required. Cyrel® DPC is foam interleaved to provide maximum protection of the plate after manufacture, and during transportation and storage.

Plates should be stacked flat. Plates should not be exposed to direct sunlight or excessive white light. Continuous exposure to very high ozone concentrations should be avoided.



The miracles of science™

Handling – Raw Material

Cyrel® DPC plates should be handled under UV free light; e.g. fluorescent tubes covered with amber sleeves.

Storage – Finished Plates

After printing, plates should be thoroughly cleaned with compatible solvent before storing. They may be stored on cylinders, sleeves or demounted and stored flat.


Technical Data		
	Cyrel® DPC 112 Thickness 2.84 mm / 0.112 inch	Cyrel® DPC 125 Thickness 3.18 mm / 0.125 inch
Durometer	38 Sh A	37 Sh A
Image Reproduction	1 – 98% / 48 L/cm	1 – 98% / 48 L/cm
Minimum positive line width	0.125 mm/ 5 mil	0.125 mm/ 5 mil
Minimum isolated dot size	250 µm	275 µm
Relief Depth	1.00 mm/ 0.039 inch	1.00 – 1.50 mm/ 0.039 – 0.059 inch

	Cyrel® DPC 155 Thickness 3.94 mm / 0.155 inch	Cyrel® DPC 250 Thickness 6.35 mm / 0.250 inch
Durometer	36 Sh A	35 Sh A
Image Reproduction	1 – 98% / 42 L/cm	2 – 95% / 34 L/cm
Minimum positive line width	0.300 mm/ 12 mil	0.300 mm/ 12 mil
Minimum isolated dot size	550 µm	500 µm
Relief Depth	1.50 – 2.00 mm/ 0.059 – 0.079 inch	1.50 – 2.50 mm/ 0.059 – 0.098 inch

All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.

United States
DuPont Customer Technology Center
Chestnut Run Plaza, Bldg. 702
Wilmington, DE 19880-0702
800.345.9999

Canada
DuPont Packaging Graphics
P. O. Box 2200, Streetsville
Mississauga, Ontario, Can., L5M 2H3
905.821.5042



To learn more, visit www.cyrel.com
or contact your Cyrel® specialist



The miracles of science™

DuPont Packaging Graphics
“Advancing Flexography”