

DuPont™ Ti-Pure® R-101

TITANIUM DIOXIDE

Product Description

DuPont™ Ti-Pure® R-101 is a rutile titanium dioxide pigment manufactured by the chloride process. It is excellent for high-temperature plastics applications requiring outstanding dispersibility and lowest possible volatility. The grade is a fine, dry, white powder with the following general properties.

Table 1
Physical Properties

Titanium Dioxide, wt%, min.	97
Alumina, wt%, max.	1.7
Organic Treatment, wt%, carbon	0.2
Specific Gravity	4.2
Mean Particle Size, μm	0.29
pH (aqueous slurry)	8.5
Resistance (aqueous slurry), k ohm-cm, min.	2

Suggestions for Use

Ti-Pure® R-101 is designed primarily for plastic applications. R-101 provides high opacity with a neutral undertone (**Figure 1**).

The low level of surface treatment on Ti-Pure® R-101 gives it excellent dry blend dispersion. **Figure 2** demonstrates relative opacity strength of pigments for simple tumble blending versus high shear dispersion.

Figure 1. Optical Properties


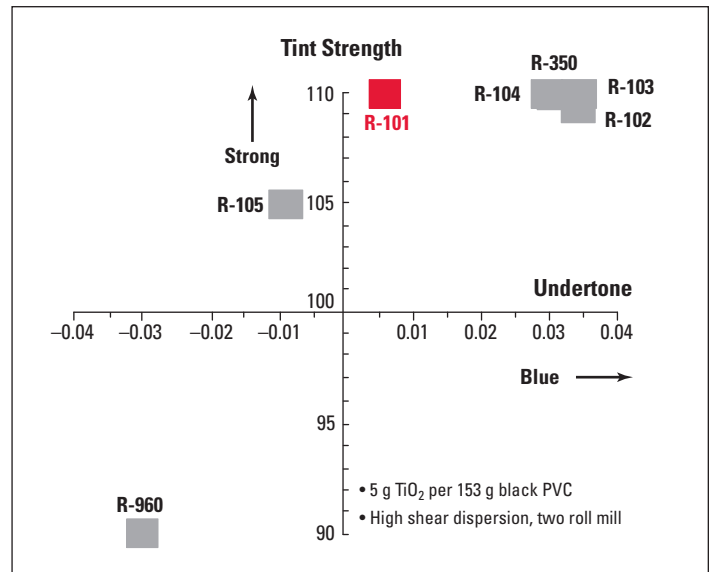


Table 2
General Properties

Opacity Strength	High
Undertone Tint	Neutral
Dispersibility in: Plasticized Vinyl Plasticizers Dry Blending Operations	Good Fair Excellent
Effect on Melt Flow	Minimal
Melt Compounding Operations	Excellent
Weathering Resistance	"Chalking" Grade in PVC Use

Figure 2. Dry Blend Dispersion Performance

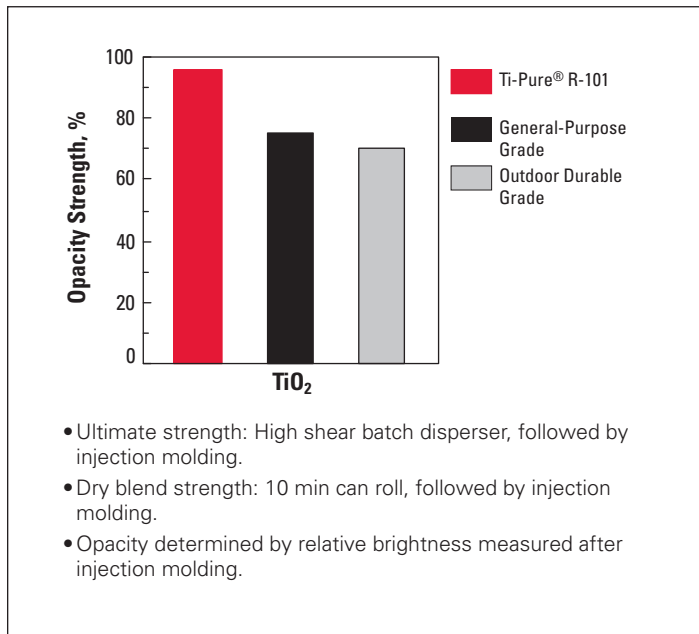

A major advantage of DuPont™ Ti-Pure® R-101 is its low level of crystalline and surface adsorbed water. This characteristic gives superior performance in high-temperature polyolefin extrusion coating operations sensitive to lacing. The very low volatility of Ti-Pure® R-101 is reflected in **Figures 3 and 4**.

Figure 3. Thermogravimetric Measurement of TiO2 Volatility


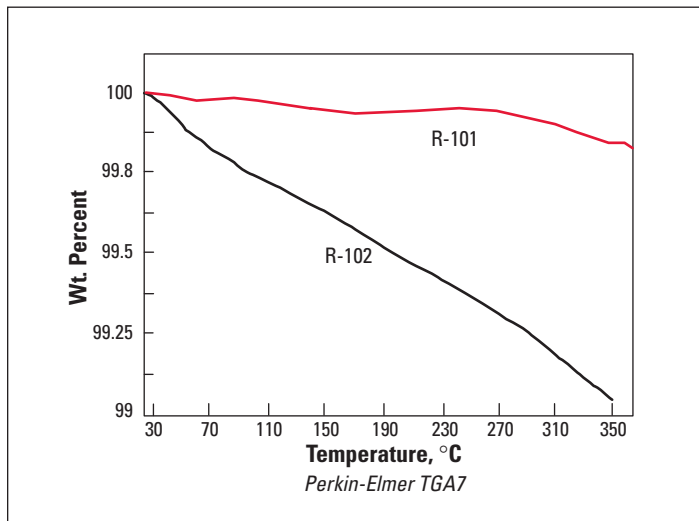


Figure 4. DuPont™ Titanium Dioxide Lacing Resistance

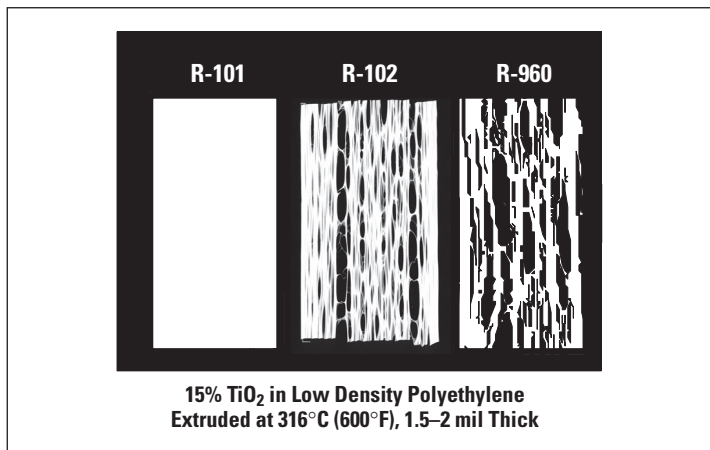

Shipping Containers

Ti-Pure® R-101 rutile titanium dioxide is available in two recyclable package types:

- 25 kg polyethylene bags
- 2,000 lb (907 kg) flexible intermediate bulk containers



Ti-Pure® R-101 is listed with NSF International for use in plastic pipe products.

For further information about this grade or to request a sample, please see the DuPont Titanium Technologies web site.

www.titanium.dupont.com

Copyright © 2007 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™, The miracles of science™, and Ti-Pure® are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates. H-52216-6 (1/07) Printed in the U.S.A.

The information set forth herein is furnished free of charge and based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own risk. Because conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. Nothing herein is to be taken as license to operate under or a recommendation to infringe any patents.



The miracles of science™